


**Information:** The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited.

This technical sheet remains subject to possible changes. All dimensions are in ft inch, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.



**TECH SHEET**  
20151102

# ANKER



**Versions:**


Anker galvanised | Anker powder coated | floor fastening

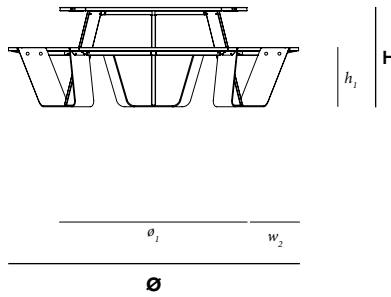


BOX 1: 3 BENCHES



BOX 2: 3 BENCH LEGS



BOX 3: TABLETOP




BOX 4: 3 TABLE LEGS



Dimensions (ft inch)	Ø	H	Ø <sub>1</sub>	w <sub>1</sub>	w <sub>2</sub>	w <sub>3</sub>	h <sub>1</sub>
Anker	7' 1"	2' 5"	4' 8"	4' 0"	0' 11"	2' 0"	1' 5"


Box dimensions (ft inch)		L	W	H	Qty (#)	Volume (ft³)	Gross weight (lb)	Net weight (lb)	Packaging weight (lb)
Anker galvanised	Box 1	4' 1"	0' 8"	1' 0"	1	3,18	57,32	51,59	5,73
	Box 2	2' 9"	2' 1"	0' 9"	1	4,94	121,25	115,74	5,51
	Box 3	4' 8"	4' 2"	0' 3"	1	6,36	61,73	51,81	9,92
	Box 4	2' 7"	0' 5"	0' 5"	1	0,35	19,84	18,96	0,88
	<b>total:</b>				<b>14,83</b>		<b>260,14</b>	<b>238,10</b>	<b>22,04</b>
Anker powder coated	Box 1	4' 1"	0' 8"	1' 0"	1	3,18	57,32	51,59	5,73
	Box 2	2' 9"	2' 1"	0' 9"	1	4,94	121,25	115,74	5,51
	Box 3	4' 8"	4' 2"	0' 3"	1	6,36	61,73	51,81	9,92
	Box 4	2' 7"	0' 5"	0' 5"	1	0,35	19,84	18,96	0,88
	<b>total:</b>				<b>14,83</b>		<b>260,14</b>	<b>238,10</b>	<b>22,04</b>

## ANKER WITH INUMBRINA

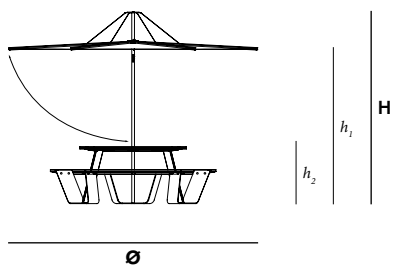


Dimensions (ft inch)	Ø	H	h <sub>1</sub>	h <sub>2</sub>
Inumbrina ø32 with Anker	10' 5"	8' 2"	6' 7"	2' 9"

## RECOMMENDED INSTALLATION

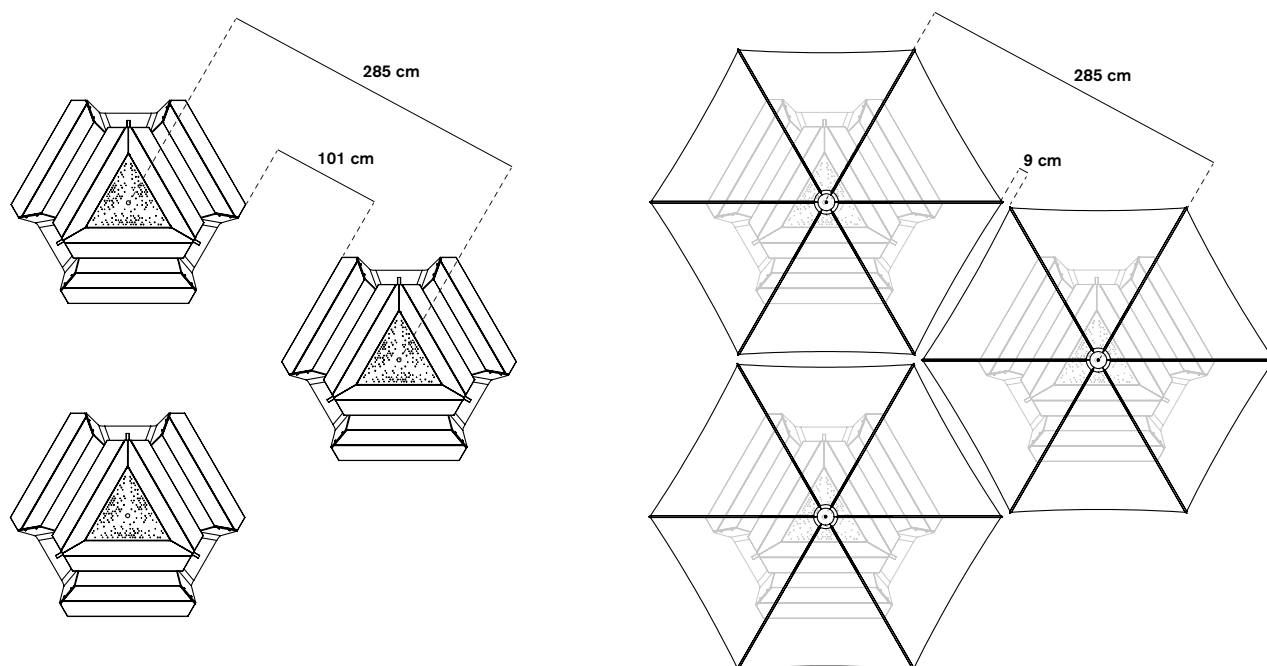

## OPTIONAL FLOOR FASTENING



BOX 5: FLOOR FASTENING



Dimensions (mm)	L	W	H
Floor fastening	0' 7"	0' 1"	0' 1"

Box dimensions (mm)	L	W	H	Qty (#)	Volume (m <sup>3</sup> )	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)	
Floor fastening	Box 5	0' 7"	0' 5"	0' 5"	1	0,35	2,80	2,65	0,15


## LEGS



Galvanised steel



Earth



White  
(ral 9003)



Black brown  
(ral 8022)

## TABLETOP & BENCH



Iroko hardwood



H.O.T.wood

## FRAME



Galvanised steel



Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV colour fastness	Flame retarding
		inch	micron					
Powder coated aluminium legs	<ul style="list-style-type: none"> <li>a technique of applying dry paint to a part</li> <li>electrostatically charged and sprayed onto the object</li> </ul>	0,31	60	0,47 10 <sup>3</sup> lb/ft <sup>3</sup>	outdoor & indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN 13501-1 A2-s1 **
Galvanised steel legs	<ul style="list-style-type: none"> <li>most durable method for protecting metal from rusting</li> <li>protective layer</li> <li>very long life span</li> <li>can perfectly be recycled</li> </ul>	0,31	50 - 100	0,47 10 <sup>3</sup> lb/ft <sup>3</sup>	outdoor & indoor	n.a.	very good, galvanisation will however become dull when used outdoors	NEN-EN13501-1 A1 *
Iroko tabletop & benches	<ul style="list-style-type: none"> <li>few maintenance</li> </ul>	0,98	n.a.	37 à 44 lb/ft <sup>3</sup>	outdoor & indoor	n.a.	untreated wood turns grey after a while	/
H.O.T. wood tabletop & bench	<ul style="list-style-type: none"> <li>very ecological</li> <li>made from European ash</li> <li>very stable</li> <li>needs few maintenance</li> <li>carries the PEFC™ label for durable forestry</li> </ul>	0,98	n.a.	37 lb/ft <sup>3</sup>	outdoor & indoor	n.a.	untreated wood turns grey after a while	/
Galvanised steel frame	<ul style="list-style-type: none"> <li>most durable method for protecting metal from rusting</li> <li>protective layer</li> <li>very long life span</li> <li>can perfectly be recycled</li> </ul>	0,11	50 - 100	0,47 10 <sup>3</sup> lb/ft <sup>3</sup>	outdoor & indoor	n.a.	very good, galvanisation will however become dull when used outdoors	NEN-EN13501-1 A1 *
ZnAlMg-coated steel tabletop	<ul style="list-style-type: none"> <li>a technique of applying dry paint to a part</li> <li>electrostatically charged and sprayed onto the object</li> </ul>	0,05	60	0,47 10 <sup>3</sup> lb/ft <sup>3</sup>	outdoor & indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN 13501-1 A2-s1 **

\* NEN-EN13501-1 A1

Class A1 products will not contribute in any stage of the fire including the fully developed fire. For that reason they are assumed to be capable of satisfying automatically all requirements of all lower classes.

\*\* NEN-EN 13501-1 A2-s1

Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.

## APPLICATIONS

**Private:** on terraces, patios, ...

**Public:** hotel and catering industry, company terraces, public spaces, ...

## GOOD TO KNOW

1. PEFC<sup>®</sup> certified wood originates from sustainably managed forests.
2. The hole in the tabletop to place an umbrella is Ø1,46 mm
3. Anker combines perfectly with Inumbrina ø32.



## FLOOR FASTENING

Anker can be fixed to the floor with our anchoring set (to be ordered separately): three jugged steel plates to be fixed with bolts. Use suitable bolts or screws from a DIY store depending on the material your terrace is made of: and combine them with this three-part floor-fastening set.

## F.A.Q.

*Q: Do you need to oil the wood?*

*A: Only if you want to maintain the original dark colour of the wood. If you don't treat it with oil, the wood will turn grey.*

## MAINTENANCE

Download the manuals from our website for maintenance instructions.