



Anker

© design by Dirk Wynants

Galvanised version
Powder-coated version
Floor fastening

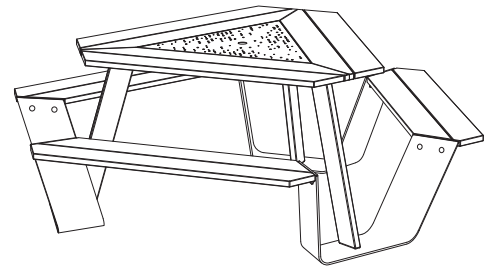

Anker

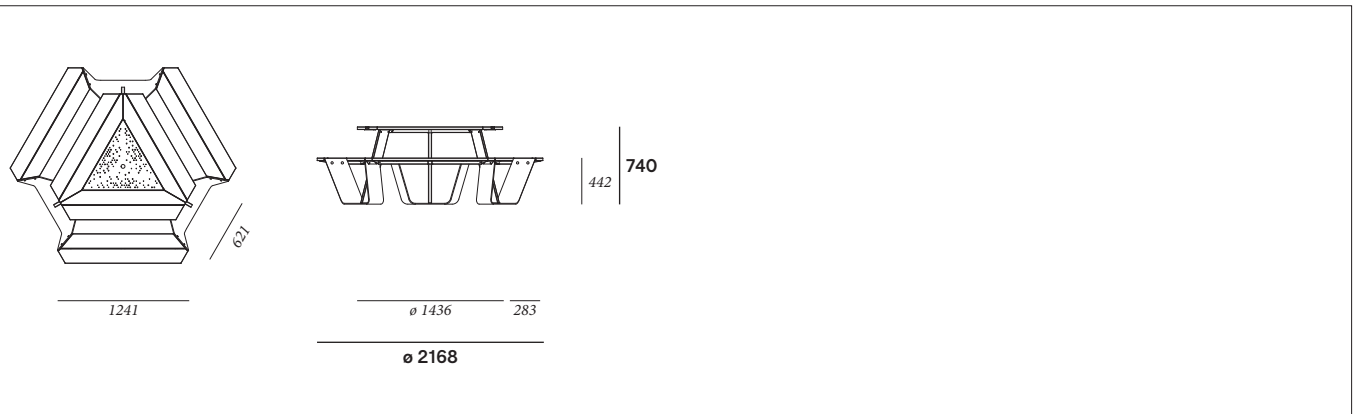

BOX 1: TABLETOP



BOX 3: 3 BENCH LEGS



BOX 2: 3 BENCHES



BOX 4: 3 TABLE LEGS




Box dimensions (mm)		L	W	H	Qty (#)	Volume (m ³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Anker galvanised	Box 1	1440	1280	95	1	0,18	45,73	41,23	4,50
	Box 2	1265	225	320	1	0,09	10,29	8,58	1,71
	Box 3	840	660	250	1	0,14	55,00	52,50	2,50
	Box 4	810	135	130	1	0,01	38,04	37,84	0,40
	total:				0,42		149,06	140,15	8,91
Anker powder-coated	Box 1	1440	1280	95	1	0,18	45,73	41,23	4,50
	Box 2	1265	225	320	1	0,09	7,71	6,00	1,71
	Box 3	810	135	130	1	0,14	55,00	52,50	2,50
	Box 4	840	660	250	1	0,01	38,04	37,84	0,20
	total:				0,42		146,48	137,58	8,91

extremis®


The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. **All dimensions are in mm**, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.

Tech sheet
20180213

Anker with inumbrina ø320

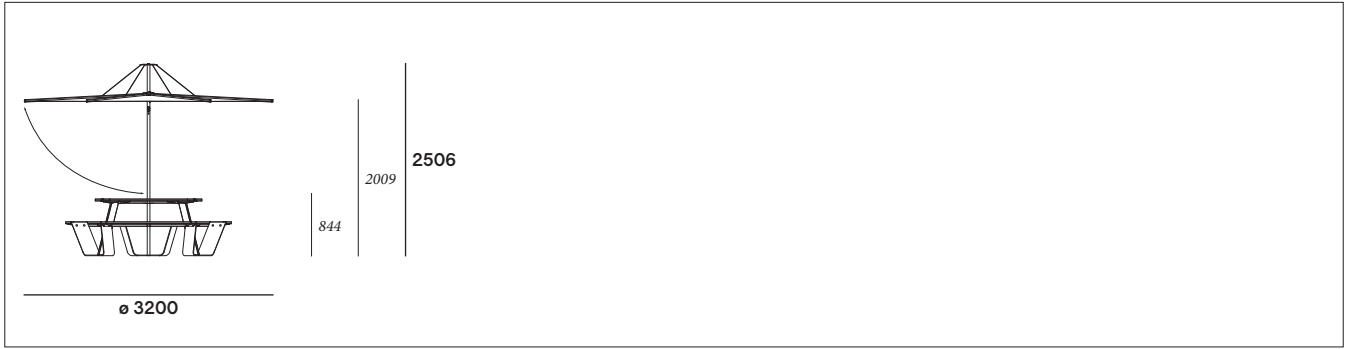


Recommended installation

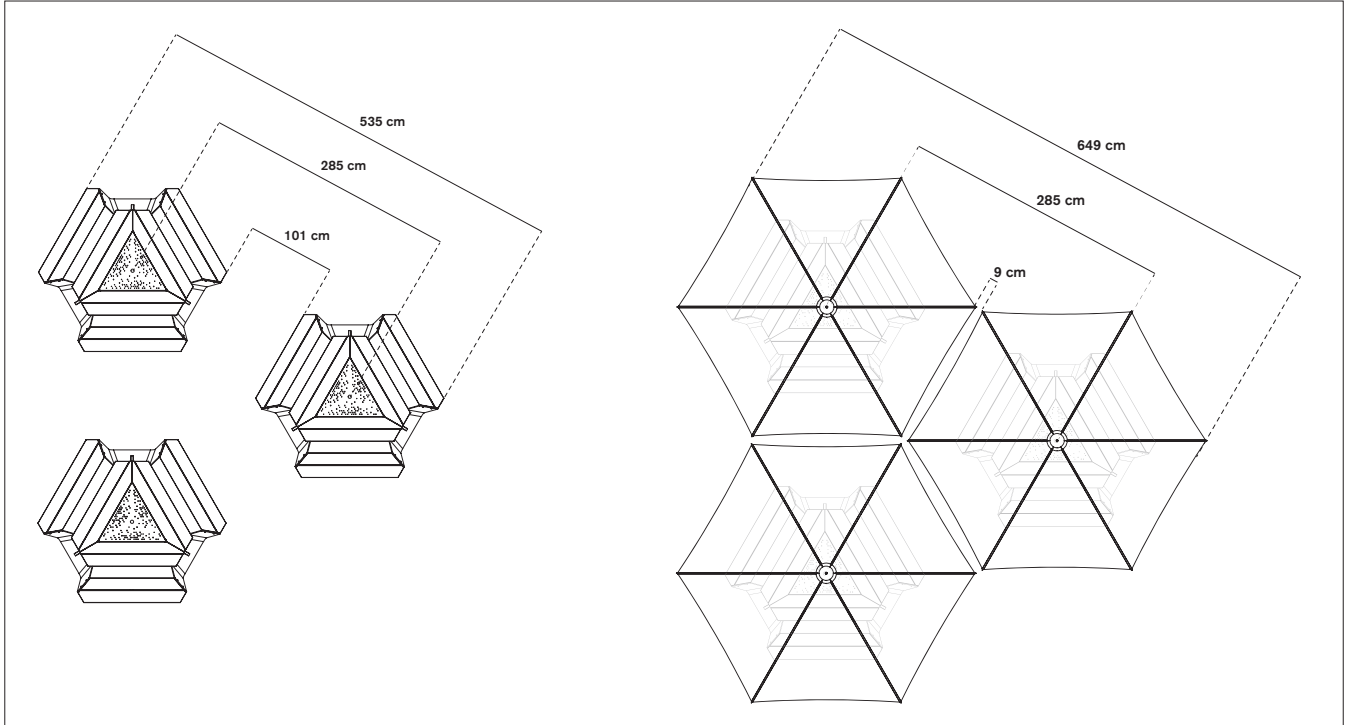


Floor fastening

Box dimensions (mm)	L	W	H	Qty (#)	Volume (m ³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)	
Floor fastening	Box 5	200	140	140	1	0,01	1,27	1,20	0,07

Materials & colours

	Tabletop & benches	 	Iroko hardwood* Hellwood*
	Table legs	 	Galvanised steel Structured powder-coating*
	Tabletop centreplate		Structured powder-coating*
	Frame		Galvanised steel

*Subject to change, check price list or www.extremis.com

Materials	Key facts	Thickness mm	Layer thickness micron	Density kg/m ³	In/outdoor	Water	UV colour fastness	Flame retarding
Iroko tabletop & benches	<ul style="list-style-type: none"> • Durability CLASS 1 • Feels comfortable in all weather conditions • Advisable to oil the wood 	25	n.a.	600 - 700 kg/m ³	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Hellwood tabletop & benches	<ul style="list-style-type: none"> • Durability CLASS 1 • Carries the PEFC™ label for durable forestry • Feels comfortable in all weather conditions • Advisable to oil the wood 	25	n.a.	600 kg/m ³	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
 Powder-coated ZnAlMg steel tabletop centreplate	<ul style="list-style-type: none"> • A technique of applying dry paint to a part • Electrostatically charged and sprayed onto the object • Scratch-resistant 	1,50	60	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN-EN 13501-1 A2-s1 **
Powder-coated aluminium table legs	<ul style="list-style-type: none"> • A technique of applying dry paint to a part • Electrostatically charged and sprayed onto the object • Scratch-resistant 	8	60	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN-EN 13501-1 A2-s1 **
Powder-coated electro galvanised steel bench support	<ul style="list-style-type: none"> • Electro galvanised (for an extra protection against rust), then powder-coated • Protective layer • Very long life span • 100% recyclable • Scratch-resistant 	8	50 - 100	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good, galvanisation will however become less shiny when used outdoors	NEN-EN13501-1 A1 *
Hot dip galvanised steel frame (& legs)	<ul style="list-style-type: none"> • Most durable method for protecting metal from rusting • Protective layer • Very long life span • 100% recyclable • Cradle to Cradle Certified™ 	3	50 - 100	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good, galvanisation will however become less shiny when used outdoors	NEN-EN13501-1 A1 *

* NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

** NEN-EN 13501-1 A2-s1



Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.

Applications

Residential: the perfect family picnic table for your terrace, patio or courtyard

Project: hotel and catering industry, company terraces, public spaces, squares, event venues, schools, ...

Recommended combinations: 3 - 5 - 7 - ...

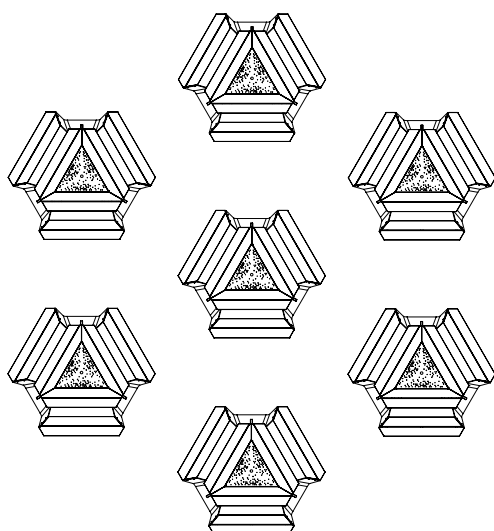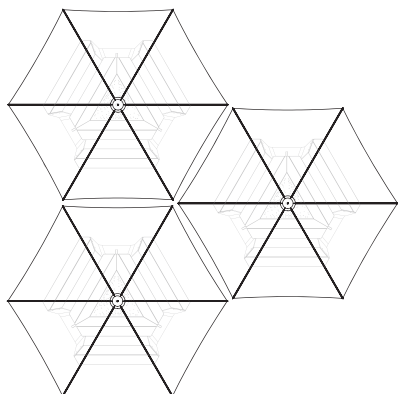

Floor fastening

Anker can be fixed to the floor with our anchoring set (to be ordered separately): three jugged steel plates to be fixed with bolts. Use suitable bolts or screws from a DIY store depending on the material your terrace is made of, and combine them with this three-part floor-fastening set.



F.a.q.

Q: Do you need to oil the wood?

A: Just like other types of wood, Iroko will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. Small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector. This 100% natural oil controls the moisture level within the wood, which makes the planks stay stable for longer, and the layer of oil also helps to prevent spilled liquids from being absorbed, so that stains tend to stay superficial. It is best to repeat this treatment at regular intervals.

Good to know

- PEFC™ certified wood originates from sustainably managed forests
- The hole in the tabletop to place a parasol is ø38 mm
- Anker combines perfectly with Inumbrina ø320



Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

POWDER-COATED PARTS

- White powder-coating requires more maintenance obviously
- Cleaning stains with a magic eraser

GALVANISED PARTS




- How to repair a damaged zinc layer

WOOD

- Cleaning regularly with mild detergent
- Thorough cleaning with Extremis Wood Cleaner
- Oiling the wood with Extremis Wood Protector. We recommend oiling the wood once or twice a year. 1x before the summer and 1x after the summer as protection for the winter.
- In order to smoothen the surface again after a thorough cleaning, lightly sand your wood with 80 grit sanding paper or a sanding pad.

USAGE ADVISE

- For Extremis Wood Protector:

	3 to 5 wood care treatments
	1 to 3 wood care treatments
	200 - 300 ml for one Anker

Fun fact

We have provided a little hook underneath the tabletop to hang purses, bags, ..

Website

www.extremis.com/anker