


Information: The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited.

This technical sheet remains subject to possible changes. **All dimensions are in mm**, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.

TECH SHEET
20160713



PONTSŪN

extremis®



Versions:

Pontsŭn 255 | Pontsŭn 325 | Pontsŭn 395

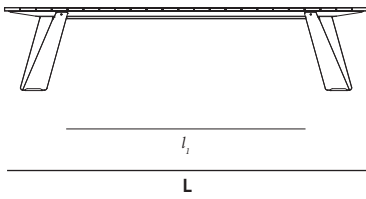

Dimensions (mm)	L	W	H	l_i	w_i
Pontsŭn 255	2535	1100	740	1430	540
Pontsŭn 325	3240	1100	740	2130	540
Pontsŭn 395	3945	1100	740	2768	540

BOX 1: TABLETOP



L



W

BOX 2: 4 LEGS

H



L



W

H

Box dimensions (mm)		L	W	H	Qty (#)	Volume (m ³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Pontsün 255	Box 1	2580	1150	180	1	0,53	77,00	75,00	2,00
	Box 2	914	269	107	1	0,03	55,00	52,50	2,50
	total:				0,56		132,00	127,50	4,50
Pontsün 325	Box 1	3280	1150	180	1	0,68	107,50	105,00	2,50
	Box 2	914	269	107	1	0,03	55,00	52,50	2,50
	total:				0,71		165,50	157,50	5,00
Pontsün 395	Box 1	3980	1150	180	1	0,82	141,00	138,00	3,00
	Box 2	914	269	107	1	0,03	55,00	52,50	2,50
	total:				0,85		196,00	190,50	5,50

LEGS



Galvanised steel



Earth



White
(ral 9003)



Black
(ral 9005)

TABLETOP



Iroko hardwood



H.O.T. wood



FRAME



Galvanised steel

Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV colour fastness	Flame retarding
		mm	micron					
Powder coated steel legs	<ul style="list-style-type: none"> a technique of applying dry paint to a part electrostatically charged and sprayed onto the object 	8	60	7,50 10 ³ kg/m ³	outdoor & indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN 13501-1 A2-s1 **
Galvanised steel legs	<ul style="list-style-type: none"> most durable method for protecting metal from rusting protective layer very long life span can perfectly be recycled 	8	50 - 100	7,50 10 ³ kg/m ³	outdoor & indoor	n.a.	very good, galvanisation will however become dull when used outdoors	NEN-EN13501-1 A1 *
Iroko tabletop	<ul style="list-style-type: none"> few maintenance 	30	n.a.	600 - 700 kg/m ³	outdoor & indoor	n.a.	untreated wood turns grey after a while	/
H.O.T. wood	<ul style="list-style-type: none"> very ecological made from European ash very stable needs few maintenance carries the PEFC™ label for durable forestry 	30	n.a.	600 kg/m ³	outdoor & indoor	n.a.	untreated wood turns grey after a while	/
Galvanised steel frame	<ul style="list-style-type: none"> most durable method for protecting metal from rusting protective layer very long life span can perfectly be recycled 	2 - 6	50 - 100	7,50 10 ³ kg/m ³	outdoor & indoor	n.a.	very good, galvanisation will however become dull when used outdoors	NEN-EN13501-1 A1 *



* NEN-EN13501-1 A1

Class A1 products will not contribute in any stage of the fire including the fully developed fire. For that reason they are assumed to be capable of satisfying automatically all requirements of all lower classes.

APPLICATIONS

Private: on terraces, patios, indoors, rooftops, ...

Public: hotel and catering industry, company terraces, (semi) public spaces, ...

GOOD TO KNOW

1. PEFC[®] certified wood originates from sustainably managed forests.
2. Pontsūn combines perfectly with Captain's Chairs.



F.A.Q.

Q: Do you need to oil the wood?

A: Only if you want to maintain the original dark colour of the wood. If you don't treat it with oil, the wood will turn grey.

Q: Won't those wide boards curl up after a while?

A: No, first of all Iroko wood is a very stable type of wood. Secondly, the tabletop is completely supported by a galvanised frame to which each board is attached separately. The wood has no structural function.

MAINTENANCE

Download the manuals from our website for maintenance instructions.