

AMAi catering station


© Design by Dirk Wynants for Extremis, 2021

extremis®



Dimensions


The AMAi catering station is available in one dimension

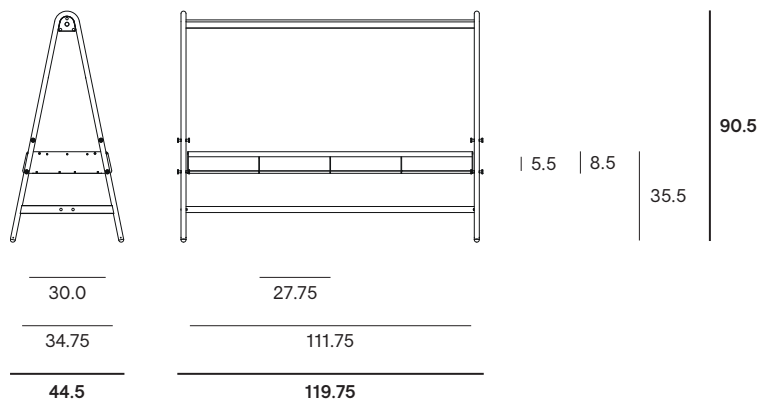


Box dimensions

The AMAi catering station comes in 6 boxes

Box 1: A-frame (2x)




Box 2: Tabletop



Box 3: Footrest



Box 4: Top profile




Box 5: Endcaps



| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|-------|--------|-------|------|-----|--------------|-------------------|-----------------|-----------------------|
| AMAi catering station | Box 1 | 92.5 | 47.25 | 3.25 | 2 | 16.60 | 93.04 | 70.99 | 22.05 |
| | Box 2 | 112.25 | 36.5 | 11.0 | 1 | 26.13 | 121.25 | 112.44 | 8.82 |
| | Box 3 | 114.25 | 7.5 | 2.75 | 1 | 1.41 | 23.59 | 20.94 | 2.65 |
| | Box 4 | 114.75 | 7.0 | 6.0 | 1 | 3.18 | 41.67 | 37.26 | 4.41 |
| | Box 5 | 7.75 | 6.0 | 3.5 | 1 | 0.35 | 1.32 | 1.10 | 0.22 |
| Total: | | | | | | 47.67 | 280.87 | 242.73 | 38.15 |

Catering station extension module


The catering station extension module is available in one dimension

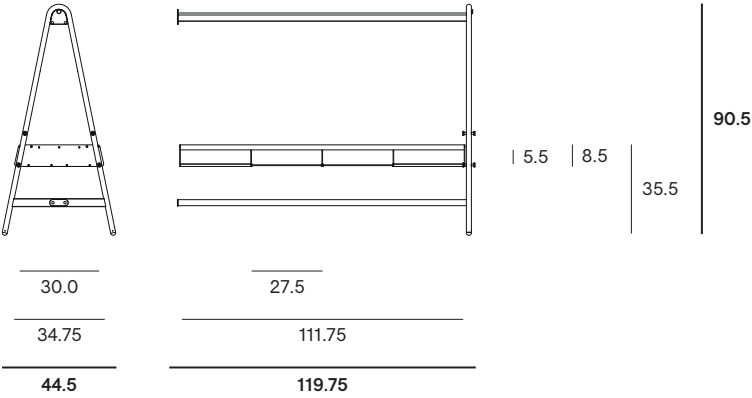


Box dimensions

The catering station extension module comes in 5 boxes


Box 1: A-frame (1x)




Box 2: Tabletop



Box 3: Footrest



Box4: Top profile






Box6: Mounting kit extension



| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|---------------------------------|-------|--------|-------|------|-----|--------------|-------------------|-----------------|-----------------------|
| AMAi catering station extension | Box 1 | 92.5 | 47.25 | 3.5 | 1 | 8.48 | 46.52 | 35.49 | 11.02 |
| | Box 2 | 112.5 | 36.5 | 11.0 | 1 | 26.13 | 121.25 | 112.44 | 8.82 |
| | Box 3 | 114.25 | 7.5 | 2.75 | 1 | 1.41 | 23.59 | 20.94 | 2.65 |
| | Box 4 | 114.75 | 7.0 | 6.0 | 1 | 3.18 | 41.67 | 37.26 | 4.41 |
| | Box 6 | 7.75 | 6.0 | 3.5 | 1 | 0.35 | 1.32 | 1.10 | 0.22 |
| Total: | | | | | | 39.55 | 234.35 | 207.23 | 27.12 |

Bar add-on

The bar add-on is available in one dimension

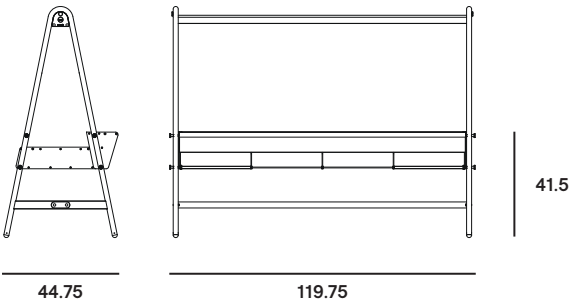


44.75

119.75

Box dimensions

The bar add-on comes in 1 box

Box 7: Bar



| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|-------|--------|-------|-------|-----|--------------|-------------------|-----------------|-----------------------|
| Bar add-on | Box 7 | 114.75 | 14.25 | 16.25 | 1 | 15.54 | 74.96 | 66.14 | 8.82 |


Lighting & charging module

The lighting & charging module is available in one dimension
The lighting & charging module is already installed in the top profile of AMAi

200 cm dimmable **LED light** in the center of the profile (black RAL9005 powder coated)
Color temperature of 3000K (warm white)
100-300 VAC / 50-60 Hz

USB-C module
2 x 60w

Lighting & charging module
With LED light and 2 usb-c ports

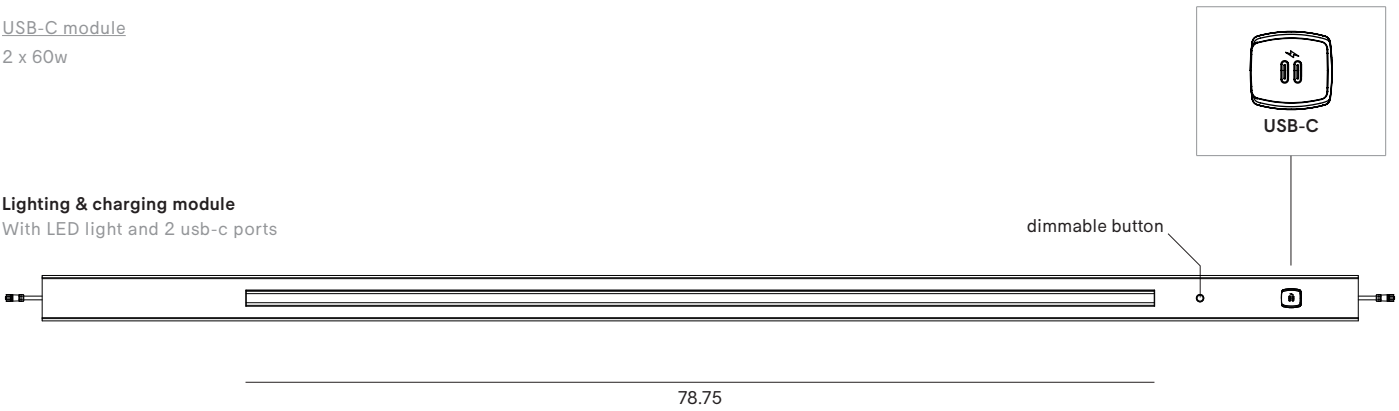


Power supply

The power supply is available in one dimension
One cable can power 2 AMAi modules.
In countries where this type of plug is not used, a different plug will need to be fitted

Connection cable Female
Rubber cable flexibel - H07RN-F
Length 5 m

24 V — IP68



Box dimensions

The lighting & charging module is packed inside the top profile

Box dimensions

The power supply comes in 1 box






Box 7: connection cable



| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|-------|------|-----|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Connection cable | Box 7 | 7.75 | 5.5 | 5.5 | 1 | 0.35 | 4.85 | 4.41 | 0.44 |

Add-on table

The add-on table is available in one dimension

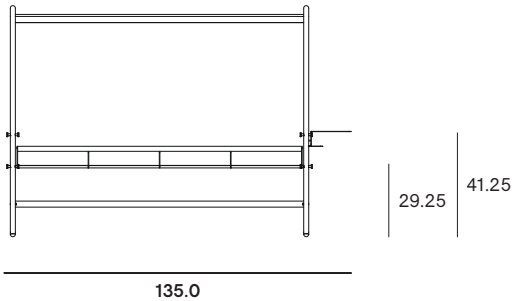

Box dimensions

The add-on table comes in 1 box


Box 9: Add-on table



| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|-------|------|-------|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Add-on table | Box 9 | 37.0 | 18.75 | 6.0 | 1 | 2.47 | 29.76 | 28.22 | 1.54 |

Shade

The shade is available in one dimension

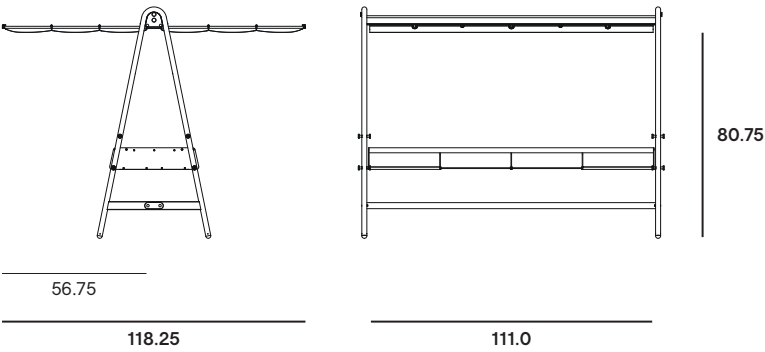


| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|--------|-------|------|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Shade (1 set) | Box 10 | 118.7 | 5.75 | 5.5 | 1 | 2.12 | 26.46 | 22.05 | 4.41 |

Box dimensions


The shade comes in 1 box

Box 10: Fabric + supports



Market shade

The market shade is available in one dimension

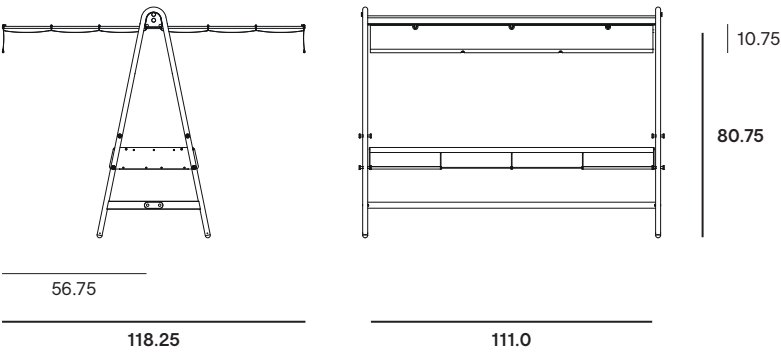


| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|--------|--------|------|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Market shade (1 set) | Box 11 | 118.75 | 5.75 | 5.5 | 1 | 2.12 | 28.66 | 24.25 | 4.41 |

Box dimensions

The market shade comes in 1 box


Box 11: Fabric + supports



Monitor holder

The monitor holder is available in one dimension

Vesa connection for computer monitor, not for a television

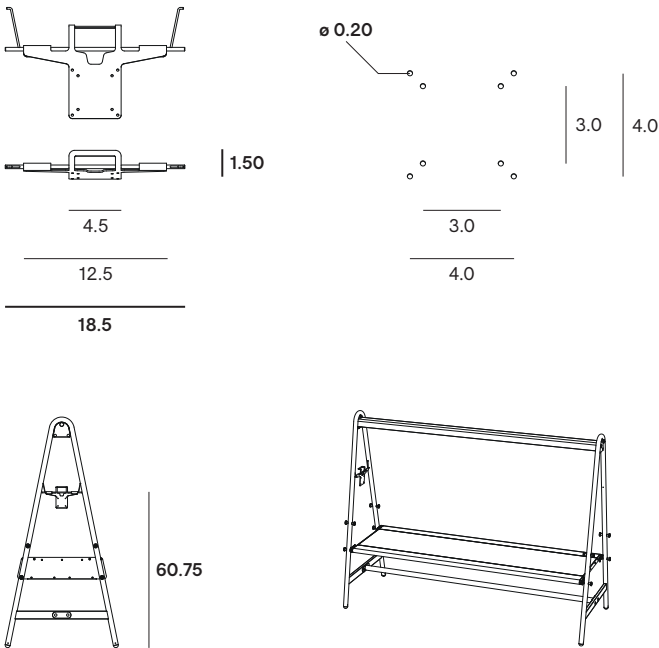

Box dimensions

The monitor holder comes in 1 box



Box 12: screenholder



| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|--------|-------|-------|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Monitor holder | Box 12 | 15.75 | 11.75 | 4.0 | 1 | 0.35 | 3.31 | 2.87 | 0.44 |

Leveling feet

The leveling feet is available in one dimension

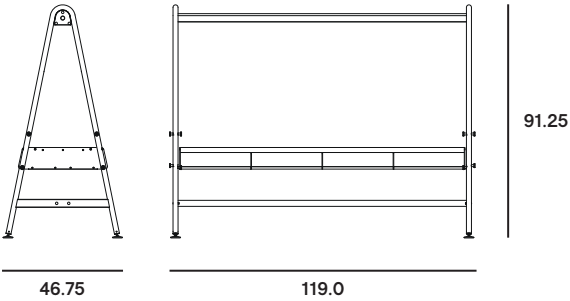

| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-----------------------|--------|------|-----|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Leveling feet (1 set) | Box 13 | 7.75 | 6.0 | 3.5 | 1 | 0.35 | 1.32 | 1.10 | 0.22 |

Box dimensions

The leveling feet comes in 1 box



Box 13: leveling feet



Floor fastening

The floor fastening is available in one dimension


The height of the floor fastening can also be adjusted.



Box dimensions

The floor fastening comes in 1 box

Box 14: floor fastening

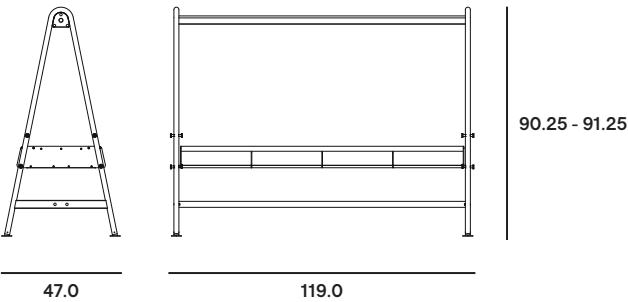

| Box dimensions (inch) | | L | W | H | Qty | Volume (ft3) | Gross weight (lb) | Net weight (lb) | Packaging weight (lb) |
|-------------------------|--------|------|-----|-----|-----|--------------|-------------------|-----------------|-----------------------|
| Floor fastening (1 set) | Box 14 | 7.75 | 6.0 | 3.5 | 1 | 0.35 | 1.54 | 1.32 | 0.22 |

Materials & colors

Check price list or www.extremis.com for current materials & colors

A-frame, top profile & tabletop



Black (RAL9005)
Structured powder coating



Beach beige (RAL1019)
Structured powder coating



Off white (RAL9002)
Structured powder coating



Copper brown (RAL8004)
Structured powder coating

Bar add-on



Black (RAL9005)
Structured powder coating



Beach beige (RAL1019)
Structured powder coating



Off white (RAL9002)
Structured powder coating




Copper brown (RAL8004)
Structured powder coating



Footrest & shade balleens



Galvanized steel
Standard included



White
High-tech polyester

| Materials | Key facts | Thickness inch | Layer thickness micron | Density | In/outdoor | Water | UV color fastness | Flame retarding |
|---|---|-------------------|------------------------------|---|------------------|-----------------------------------|--|------------------------|
| Structured powder coated stainless steel A-frame | <ul style="list-style-type: none"> Easy to clean Stainless steel (for protection against rust), then powder coated More scratch-resistant than non structured powder coating | 0.07 | 50 - 100 | 0.49 10 ³ lb/ft ³ | Outdoor & indoor | n.a. | Very good: color can fade to some extent when exposed to UV | NEN-EN13501-1 A1 * |
| Structured powder coated aluminium tabletop side profiles & top profile | <ul style="list-style-type: none"> A technique of applying dry paint to a part Electrostatically charged and sprayed onto the object More scratch-resistant than non structured powder coating | 0.07-0.39 | 50 - 100 | 0.47 10 ³ lb/ft ³ | Outdoor & indoor | n.a. | Very good: color can fade to some extent when exposed to UV | NEN-EN13501-1 A2-s1 ** |
| Structured powder coated ZnAlMg steel tabletop centerplate | <ul style="list-style-type: none"> A technique of applying dry paint to a part Electrostatically charged and sprayed onto the object More scratch-resistant than non structured powder coated | 0.07 | 60 | 0.47 10 ³ lb/ft ³ | Outdoor & indoor | n.a. | Very good: color can fade to some extent when exposed to UV | NEN-EN13501-1 A2-s1 ** |
| Hot dip galvanized steel footrest & shade balleens | <ul style="list-style-type: none"> Most durable method for protecting metal from rusting Protective layer Very long life span 100% recyclable Cradle to Cradle Certified™ | 0.07 | 50 - 100 | 0.47 10 ³ lb/ft ³ | Outdoor & indoor | n.a. | Very good. galvanization will however become less shiny when used outdoors | NEN-EN13501-1 A1 * |
| High-tech polyester fabric | <ul style="list-style-type: none"> High UV resistance and ultra strong Low weight / high tear strength Long-term appearance | 0.37 | n.a. | 8.50 oz/ft ² | Outdoor & indoor | Water column of 350 mm (EN 20811) | 7/8 (ISO 105-B02) | / |
| LED light | <ul style="list-style-type: none"> Color temperature of 3000K Beam angle of 50° 1380 mA 46 W 220 V - 50/60 Hz | n.a. | n.a. | n.a. | Outdoor & indoor | | / | / |

| | |
|---------------------|--|
| NEN-EN13501-1 A1 | Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well. |
| NEN-EN13501-1 A2-sl | Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will significantly contribute to the fire load a fire growthwell. |

Good to know

- There are two types of base- and extension modules, without or with lighting and charging module.
- Patented

Floor fastening

AMAI comes with an optional floor anchoring set: four steel plates to be fixed with bolts.

F.A.Q.

- Q: How wind resistant is tha shade?
- A: Tests in a windtunnel have shown that the shade withstands wind speeds up to 31 mph. Still, we strongly advise to close it sooner (from 18 mph is the rule of thumb).

Maintenance

Find maintenance instructions at the [product care section](#) on [extremis.com](#) for

- POWDER COATED PARTS**
- Use Extremis multi cleaner, a 100% biodegradable detergent or common kitchen cleaning products. Avoid using aggressive products. These surfaces are best cleaned with a neutral cleaning product diluted in water.
- GALVANIZED PARTS**
- Clean with lukewarm water and a mild detergent or Extremis multi cleaner.
- SHADE FABRIC**
- Shake or brush off loose dirt immediately.
 - Spray Extremis Multi Cleaner.
 - Use a soft brush and make circular movements.
 - Let the suds soak in for a moment.
 - Rinse thoroughly to remove all soap residue.
 - Simply allow to dry.

Warnings ⚠

| | | |
|---|--|--|
| <p>General</p> <ul style="list-style-type: none">• Do not use any sharp tools to open the packaging.• We strongly advise against using power tools.• Tripping hazard, mind your step.• Do not put out cigarettes on the table.• Not grafitti proof.• Do not leave children unattended whilst playing on the table.• To avoid danger of suffocation, keep plastic bags away from babies and children.• Colors can differ over years and from batch to batch. <p>Product</p> <ul style="list-style-type: none">• Do not stand or jump on the table.• Do not drag the table, but carry it with minimum 2 people.• Anchoring the product has to be done by qualified people.• For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.• Tests in a windtunnel have shown that the shade | <p>withstands wind speeds up to 6 on the Beaufort scale (49 km/h). Still, we strongly advise to close it sooner (from 4 on the Beaufort scale is the rule of thumb (28 km/h)).</p> <p>Powder coating</p> <ul style="list-style-type: none">• White powder coating requires more maintenance.• Do not use abrasive scouring powders or scourers as they will scratch the surface.• Color can fade to some extent when exposed to UV.• Flame retarding - NEN-EN13501-1 A2-sl - Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth.• Dark colors can get very hot in sunny weather. <p>Galvanized steel</p> <ul style="list-style-type: none">• Galvanization will become less shiny when used outdoors.• Flame retarding - NEN-EN13501-1 A1 - Class A1 products will not contribute to fire in any stage, | <p>including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.</p> <ul style="list-style-type: none">• Possible impurities in the immersion tank can cause black marks during galvanization, which are intrinsic to this industrial finishing technique.• White marks on this zinc layer are also intrinsic to this procedure and will disappear when the furniture is put outdoors.• This industrial finishing technique may result in a rougher surface. This is intrinsic to the process. <p>High-tech polyester</p> <ul style="list-style-type: none">• Shake or brush off loose dirt immediately.• Do not use any aggressive detergents as they will remove the protective coating of the fabric.• We strongly advise you not to use a high-pressure hose for cleaning. |
|---|--|--|